



### Voice Mail Processing for Small Business


Managing voice message processing is a key component of your telephone system. The voice mail system (LVMU1A) integrates with the Strata® CIX™ business communication system to provide:

- > Automated Attendant to answer incoming calls
- > Call Routing to direct calls to the person or department the caller wants
- > Telephone Answering to take messages when an employee is unavailable
- > Voice Messaging to create, send, receive, forward, and save voice messages
- > Call Monitoring of callers leaving messages, with an option to retrieve the call
- > LCD Soft Key Navigation of voice mail
- > Bilingual Support (English/Spanish)
- > Call Screening to announce the calling party
- > Message Notification to let users know when a voice message arrives

Toshiba Voice Processing Gives You the Ability to:

- > Simplify voice mailbox operation through an intuitive user interface
- > Record calls directly into your voice mailbox with a single button on your telephone
- > Communicate effectively both in and out of the office with other employees and customers 24 hours-a-day, 365 days-a-year

The Strata CIX voice mail integrates voice processing on a single printed circuit card inside the Strata CIX chassis. Because there is no need for external connections, standard telephone ports, or separate power backup systems, the LVMU1A decreases the cost and complexity of deploying voice mail applications.

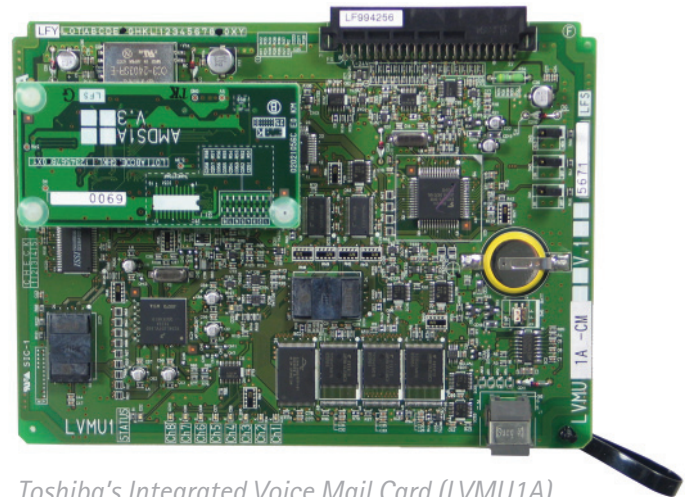

*Toshiba's Integrated Voice Mail Card (LVMU1A)*

## SPECIFICATIONS

Model	LVMU1A			
Capacities	Minimum configuration 2 ports, expandable to 4, 6, or 8 ports via licensing upgrade. Message storage 40 hours. 360 mailboxes.			
PCB Measurements	Width	Height	Depth	Weight
<i>Metric</i> <i>English</i>	33 mm 1.0 in	191 mm 7.5 in	152 mm 5.5 in	4 kg 5.8 lbs
Power Supply Unit (PSU)	Uses hosting Strata CIX power supply.			
Primary AC Power	Input AC 120VAC, 4.0 amps maximum. AC Frequency Single-phase (48Hz - 62Hz).			
Power Backup	Provided by the power backup of the hosting Strata CIX chassis.			
Cooling	Convection			
Operating Temperature	39~104° F (4~40° C)			
Operating Humidity	20~80% relative humidity without condensation.			
Storage Temperature	-4~140° F (-20~60° C)			
Chassis Installation	Printed circuit board installs in card slot in Strata CIX100, CIX200, or CIX670 chassis.			
Compliance	Safety: UL EMC: FCC Part 15 Class A (Subpart J)			
Data Storage Media	Compact Flash 512MB.			
NAND	NDR Integrated Circuit Modules			
Operating System	ROM DOS Proprietary Embedded			
Voice Resources	On-board (8 channels maximum)			
Modem	Internal soft modem 14.4Kbps; Onboard Modem Card (33.6 Kbps)			
Communication Ports	One RS-232 COM port.			
Connection to Strata CIX	Direct backplane in slot in Strata CIX chassis.			
Remote Access	Modem			
Standard Applications	Stratagy Voice Mail, Auto Attendant			

Toshiba America Information Systems, Inc., Telecommunication Systems Division

9740 Irvine Blvd., Irvine, CA 92618-1697 (949) 583-3700 [www.telecom.toshiba.com](http://www.telecom.toshiba.com)

© 2007-2008 Toshiba America Information Systems, Inc. All product, service and company names are trademarks, registered trademarks or service marks of their respective owners. Information including without limitation specifications, availability, content of services, and contact information is subject to change without notice.

Literature Order #: TSD-LVMU1A-DS-VB/4500123

